


OVERHEAD VIEW


Letters indicate anchor configuration

- = Anchor ring placement
- = Anchor weight 500 kg / 1102 lbs.
- = Anchor weight 100 kg / 220 lbs.

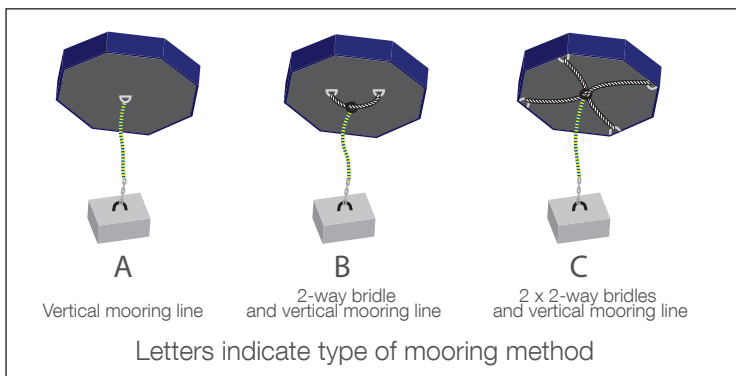

SIDE VIEW

NOTE: Anchoring for this item is only necessary if one end will not be connected to another product.
There are D-rings along the waterline. These rings can be used to anchor. We recommend attaching a 2-way bridle to two of these D-rings.

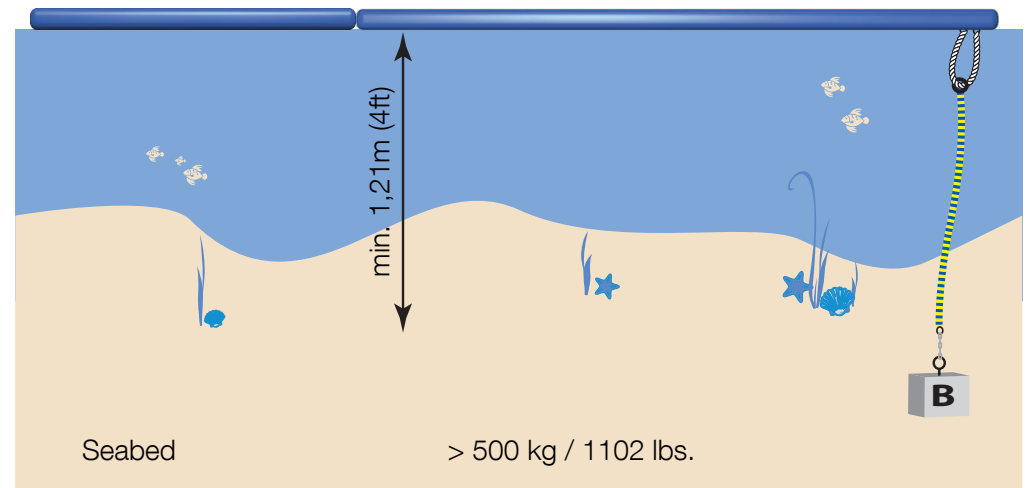

Anchor Requirements for lakes / open sea

- 1 x Anchor weight 500 kg / 1102 lbs.
- 1 x 2meter vertical mooring lines
- 1 x 2-way mooring bridles

Runway 20 Specs:

Size: L 20' x W 5' x H 0.3'
(L 6m x W 1,5m x H 0,1m)

Anchor Rings: 0
D-rings Rings: 10

Water Depth

Minimum - 1,21m (4ft)

The weight data refers to the anchoring in Ocean conditions (extreme weather, waves, etc.). The weights needed for anchoring in locations with calmer conditions (no waves, calm wind) such as lakes is approximately 30% less.

